

REPIPE

Pipe, Connections & Valves

"Connecting Australia"

RESILIENT SEATED GATE
VALVE - FLANGED

ISO 9001 CERTIFIED COMPANY

FLOWCOM FIG 907 RESILIENT SEATED GATE VALVE - FLANGED

FEATURES

- Resilient Seat
- Valve Complies With AWWA C515/BS5163
- Coating: Fusion Bonded Epoxy Coated Interior & Exterior to AWWA C550
- UL Listed
- FM Approved



OPTIONS

- Flange Ends: ANSI B16.1 Class 125 Drilled Table D/E or ANSI

TECHNICAL DATA

- Code: VG3299-OSY-EorA(size DN)
- Size Ranges: DN50 to DN 300
- Working Pressure: 300 psi (UL/FM Approved)
350 psi (General Purpose)
- Temperature: -10°C to 120°C


DIMENSIONS

Size	DN50*	DN65	DN80	DN100	DN150	DN200	DN250	DN300
	mm	mm	mm	mm	mm	mm	mm	mm
L	178	191	203	229	267	292	330	356
H	390	415	510	568	769	960	1139	1326
D	180	183	254	254	315	375	416	445

*Note: DN50 is FM Approved to 250psi.

MATERIAL

Part Name	Material	ASTM Spec
Handwheel	Ductile Iron	A536
Stem Nut	Bronze	B62
Packing	EPDM	D2000 Non Asbestos
Gasket	EPDM	D2000 Non Asbestos
Bonnet	Ductile Iron	A536 65-45-12
Stem	Bronze	B150 UNS C1400
Wedge Nut	Bronze	B584 UNS 83600
Wedge	Ductile Iron	A536 with EPDM D200 coating
Body	Ductile Iron	A536

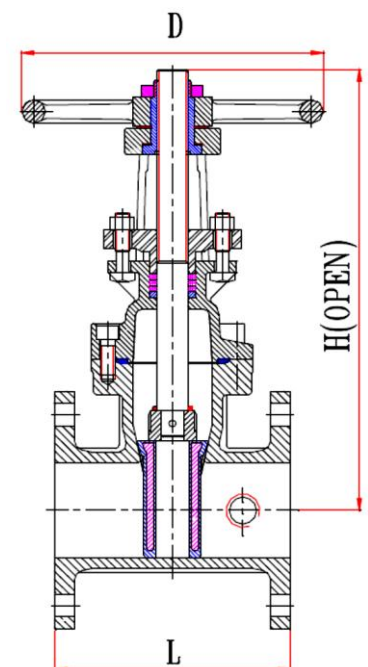

SYDNEY- NEWCASTLE – PERTH – 1300 362 954 – sales@repipe.com.au

Distributors of Quality Products Australia Wide