

REPIPE

Pipe, Connections & Valves
Connecting Australia

RESILIENT SEATED GATE
VALVE - GROOVED

ISO 9001 CERTIFIED COMPANY

FLOWCOM FIG. 135 RESILIENT SEATED OS&Y GATE VALVE GROOVED

- Grooved Valves are Suitable for Roll Grooved & Cut Grooved Pipe Work

FEATURES

- Complies with AWWA C515
- UL Listed
- FM Approved (up to 300 psi)

TECHNICAL DATA

- Code: VG3299-300-G(size DN)
- Size Range: DN50 – DN300
- Working Pressure: 350 psi (General Purpose)
300 psi (ULFM Approved)
- Temperature: -10°C to 120°C
- Grooved Dimensions: Complies With Metric or AWWA C606 Standard
- Coating: Fusion Bonded Epoxy Coated Interior & Exterior To AWWA C550




DIMENSIONS

Size	DN65	DN80	DN100	DN150	DN200	DN250	DN300
	mm	mm	mm	mm	mm	mm	mm
OD	76.1	88.9	114.3	165.1	219.1	273	323.9
L	190	203	229	267	292	330	356
H (open)	453	510	568	769	960	1139	1326
D	200	254	254	315	375	416	445

MATERIAL LIST

Part Name	Material	ASTM Spec
Handwheel	Ductile Iron	ASTM A536
Stem Nut	Bronze	B62
Packing	EPDM	D2000 Non Asbestos
Gasket	EPDM	D2000 Non Asbestos
Bonnet	Ductile Iron	ASTM A536
Stem	Bronze	ASTM B150 UNS C1400
Wedge Nut	Bronze	ASTM B584 UNS 83600
Wedge	Ductile Iron	A536 with EPDM encapsulation
Body	Ductile Iron	ASTM A536

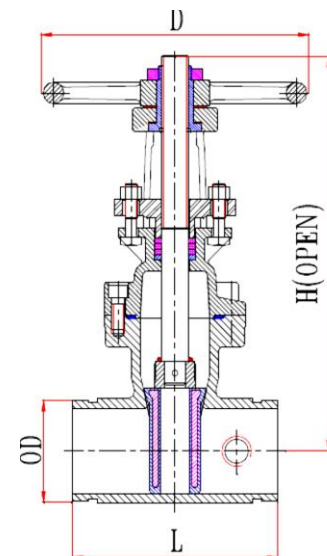

SYDNEY- NEWCASTLE – PERTH – 1300 362 954 – sales@repipe.com.au

Distributors of Quality Products Australia Wide