

# REPIPE

Pipe, Connections & Valves

**"Connecting Australia"**

INTERLOCK SHOULDERED  
PIPE COUPLINGS

ISO 9001 CERTIFIED COMPANY

## INTERLOCK SHOULDERED PIPE COUPLINGS

### FEATURES

- The unique split hinge construction allows the coupling to be assembled from one side so that an adjacent pipe or even a wall will not interfere with installation or removal.
- Very Easy to Install
- No Loose Parts
- Captive Washer on the Nut and the Bolt is Retained in the Housing
- Suitable for Pressure or Vacuum Applications
- Single Bolt Design
- 'No Pinch' Housing Design Assures a Positive Gasket Seal
- High Pressure Applications
- Patented Design




### TECHNICAL DATA

- Code: FKG-502L-(size OD)
- Size Range: DN50 – DN200

### DIMENSIONS

Pipe Size DN	Pipe OD Inch	Part Number	Working Pressure		Weight Kg
			Kpa	PSI	
50	2	FKG-502L-60	3500	500	0.75
80	3	FKG-502L-88	3500	500	1.0
100	4	FKG-502L-114	3500	500	1.9
150	6	FKG-502L-165	2500	360	3.3
200	8	FKG-502L-219	2500	360	5.4

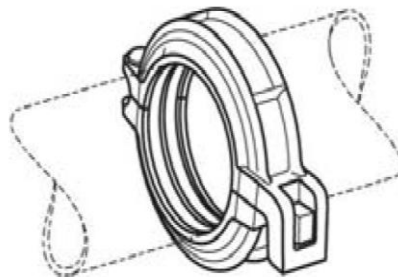

**Please Note: Correct gasket and coupling selection is important to ensure correct pipeline performance, if in doubt please contact our office.**

SYDNEY- NEWCASTLE – PERTH – 1300 362 954 – sales@repipe.com.au

**Distributors of Quality Products Australia Wide**

The data provided here is for information purposes only. Repipe reserves the right to change or modify this data without prior notice.

Y:\CATALOGUE & DATA SHEETS - MASTER\Datasheet Masters\PIPE & FITTINGS\Interlock Shouldered Coupling.docx